

INSTALLATION INSTRUCTIONS

88029

REV F

FOR SUSPENSION SYSTEMS RS6503: JEEP WRANGLER (TJ)

READ ALL INSTRUCTIONS THOROUGHLY FROM START TO FINISH BEFORE BEGINNING INSTALLATION



IMPORTANT NOTES!

WARNING: This suspension system will enhance the off-road performance of your vehicle. It will handle differently, both on and off-road, from a factory equipped passenger car or truck. Failure to drive this vehicle safely may result in serious injury or death to the driver and passengers. ALWAYS WEAR your seat belts, REDUCE your speed, and AVOID sharp turns and other abrupt maneuvers.

- A. The vehicle's alignment must be within factory specifications before installing this system. Have the alignment checked at a state approved facility.
- B. Check the frame of the vehicle for any damage or severe corrosion. If there is any structural damage, Do Not install this system
- C. Do not install a body lift kit with Rancho's suspension system or interchange parts from this system with components from another manufacturer. Use the appropriate Rancho shock absorbers. Contact your local Rancho representative for the correct application.
- D. Compare the contents of this system with the parts list in these instructions. If any parts are missing, including fasteners, contact the Rancho Technical Department at 1-734-384-7804. Each hardware kit in this system contains fasteners of high strength and specific size. Do not substitute a fastener of lesser strength or mix one hardware kit with another.
- E. Apply THREAD LOCKING COMPOUND to all bolts during installation. One drop on the exposed threads of each bolt before installing the nut is sufficient to provide an adequate bond. CAUTION: Thread locking compound may irritate sensitive skin. Read warning label on container before use.
- F. Install all nuts and bolts with a flat washer. When both SAE (small OD) and USS (large OD) washers are used in a fastener assembly, place the USS washer against the slotted hole and the SAE washer against the round hole.

G. Unless otherwise specified, tighten all bolts to the standard torque specifications listed at the end of the note's section. Do not use an impact wrench to tighten any of these bolts. They tend to over tighten smaller bolts and under tighten larger bolts. USE A TORQUE WRENCH!!!

H. Rancho parts come with a protective coating. Do not chrome, cadmium, or zinc plate any of the components in this kit, or alter their original finish in any way. However, you may add a layer of Enamel paint over the original coating.

I. Do not weld anything to these components, and do not weld any of these components to the vehicle. If any component breaks or bends, contact your local Rancho dealer or Rancho for replacement parts.

J. Some of the service procedures require the use of special tools designed for specific procedures. These special tools should be used when recommended.

K. The following tools and supplies are recommended for proper installation of this kit.

- Jeep Service Manual
- Spring Compressor
- Drill Motor
- 23/64", 15/32", 13/32" and 9/32" Drills
- Torque Wrench (250 FT-LB capacity)
- 1/2" Drive Ratchet and Sockets
- Combination Wrenches
- Allen Wrenches
- Torx Key Sockets
- Heavy Duty Jack stands
- Wheel Chocks (Wooden Blocks)
- Hydraulic Floor Jack

- Large "C" Clamps and or Bench Vise
- Hammer
- Molybdenum Grease or Anti Seize Compound
- Silicone Spray
- Safety Glasses**--Wear safety glasses at all times

L. It is extremely important to replace torsion bars, CV flanges, and front drive shaft/pinion relationships as original. Be sure to mark left/right, front/rear, and indexing of mating parts before disassembly. A paint marker or light colored nail polish is handy for this.

M. Suspension components that use rubber or urethane bushings should be tightened with the vehicle at normal ride height. This will prevent premature failure of the bushing and maintain ride comfort.

N. The required installation time for this system is approximately 5 to 6 hours. Check off the box () at the beginning of each step when you finish it. Then when you stop during the installation, it will be easier to find where you need to continue from.

O. Important information for the end user is contained in the consumer/installer information pack. If you are installing this system for someone else, place the information pack on the driver's seat. Please include the installation instructions when you finish.

P. Thank you for purchasing the best suspension system available. For the best installed system, follow these instructions. If you do not have the tools or are unsure of your abilities, have this system installed by a certified technician. RANCHO IS NOT RESPONSIBLE FOR DAMAGE OR FAILURE RESULTING FROM IMPROPER INSTALLATION OF THIS SUSPENSION SYSTEM.

STANDARD BOLT TORQUE SPECIFICATIONS						
INCH SYSTEM			METRIC SYSTEM			
Bolt Size	Grade 5	Grade 8	Bolt Size	Class 9.8	Class 10.9	Class 12.9
5/16	15 FT-LB	20 FT-LB	M6	5 FT-LB	9 FT-LB	12 FT-LB
3/8	30 FT-LB	35 FT-LB	M8	18 FT-LB	23 FT-LB	27 FT-LB
7/16	45 FT-LB	60 FT-LB	M10	32 FT-LB	45 FT-LB	50 FT-LB
1/2	65 FT-LB	90 FT-LB	M12	55 FT-LB	75 FT-LB	90 FT-LB
9/16	95 FT-LB	130 FT-LB	M14	85 FT-LB	120 FT-LB	145 FT-LB
5/8	135 FT-LB	175 FT-LB	M16	130 FT-LB	165 FT-LB	210 FT-LB
3/4	185 FT-LB	280 FT-LB	M18	170 FT-LB	240 FT-LB	290 FT-LB

BOLT IDENTIFICATION	
<div style="text-align: center;"> <p>1/2-13x1.75 HHCS</p> <p>D T L X</p> </div> <p>G = Grade Marking (bolt strength) D = Nominal Diameter (inches) T = Thread Pitch (threads per inch)</p> <p>L = Length (inches) X = Description (hex head cap screw)</p>	<div style="text-align: center;"> <p>M12-1.25x50 HHCS</p> <p>D T L X</p> </div> <p>P = Property Class (bolt strength) D = Nominal Diameter (millimeters) T = Thread Pitch (thread width, mm)</p> <p>L = Length (millimeters) X = Description (hex head cap screw)</p>



PARTS LIST

<u>P/N</u>	<u>DESCRIPTION</u>	<u>QTY.</u>	<u>P/N</u>	<u>DESCRIPTION</u>	<u>QTY.</u>
130019	Right Track Bar Bracket	1		7/16 SAE Washer	2
176637	Lower Suspension Arm	4		M12-1.75x70 HHCS	2
615	Front Coil Spring (RS6503 only)	2		M12-1.75 Nut	2
616	Rear Coil Spring	2		SAE Washer	4
8567	Rear Bump Stop Spacer Kit	1		3/8-16x1.0 HHCS	1
	Spacer	2		3/8-16 Stover Nut	1
8597	Bushing/Sleeve Kit	1		3/8 SAE Washer	2
	Sleeve	8	860073	Skid Plate Spacer Kit	1
	Bushing	16		Skid Plate Spacer	6
860070	Shim Kit	1		1/2 Cone Washer	6
	Shim	16		1/2-13x2.5 FSHCS	6
860071	Shift Relocation Kit	1		M10-1.50x70 HHCS	2
	Bracket	1		10mm Lock Washer	2
	1/4-20x.75 BHCS	4	860483	Skid Plate Hardware Kit	1
	1/4 SAE Washer	4		M12-1.75 x 65 HHCS	6
	1/4-20 Nyloc Nut	4		12mm Washer	6
	Thread Lock	2	94180	Consumer Information Pack	1
860072	Track Bar Relocation Kit	1	780281	Rancho Sticker	1
	Sleeve	1	88029	Instructions	1
	7/16-14x1.0 HHCS	1	94119	Consumer/Warranty Information	1
	7/16-14 Stover Nut	1	94177	Warning Sticker	1

LOWER SUSPENSION ARM ASSEMBLY

Bushing & Sleeve Installation

1. Lubricate the outside diameter of two red urethane bushings, from kit 8597, with a silicone spray or a mild solution of soap and water.
2. Press the bushings (Do Not Hammer) into one end of a new lower suspension arm. See Figure 1.

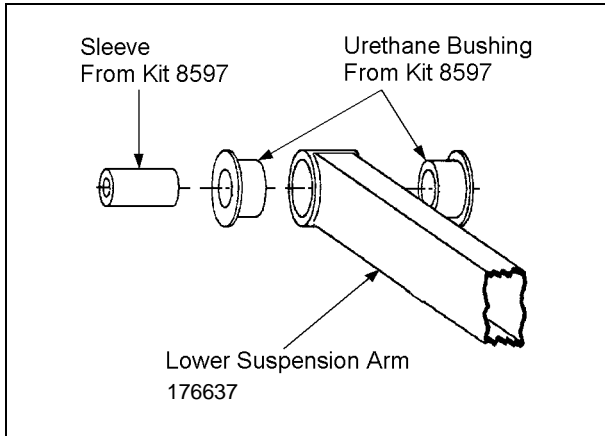


Figure 1

3. Lubricate the outside diameter of a sleeve, from kit 8597, and the inside diameter of the installed urethane bushings.
4. Press the sleeve into the bushings.

NOTE: If necessary, use a bench vise or C-clamp to press the bushings and sleeves into the suspension arm. Do not use a hammer.

5. Pre-grease arm assembly with a grease gun. Make sure not to blow the bushings out of the assembly. Stop when grease appears at the end of the bushing grooves.
6. Repeat steps 1 through 5 for the remaining suspension arm ends, bushings, and sleeves.

FRONT SUSPENSION ►

Shock & Spring Removal

1. Park vehicle on a level surface, set the parking brake and chock rear wheels.

2. From inside the engine compartment, remove the upper stud nut, retainer and grommet from both front shock absorbers.
3. Raise the front of the vehicle and support the frame with jack stands.
4. Remove the front wheels.
5. Position a hydraulic jack under the front axle for support. Remove the stabilizer link lower nut and bolt from both sides of the front axle. See Figure 2

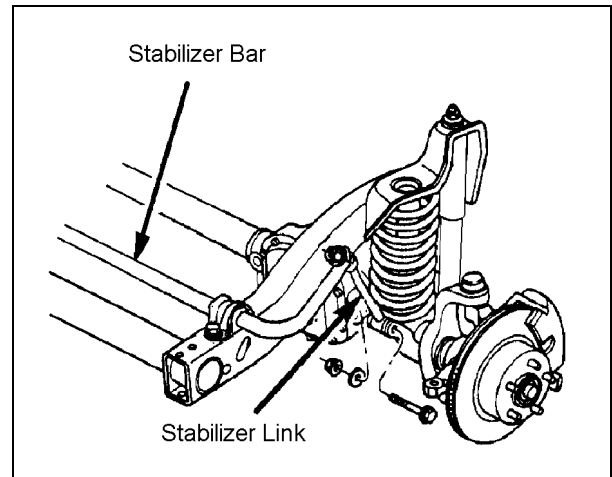


Figure 2

6. Remove the shock absorber lower nuts and bolts from the axle bracket. Remove both shocks and discard. **DO NOT REUSE ORIGINAL SHOCK ABSORBERS.**
7. Lower axle and remove hydraulic jack.
8. Remove the rubber bump stops and bump stop mounts.
9. Remove the coil spring retainer bolts and retainers.
10. Push down on the axle and remove each coil spring.

Lower Arm Replacement

1. Support the front axle with a hydraulic jack.
2. Paint or scribe alignment marks on the adjustment cams and axle brackets for installation reference. See Figure 3.

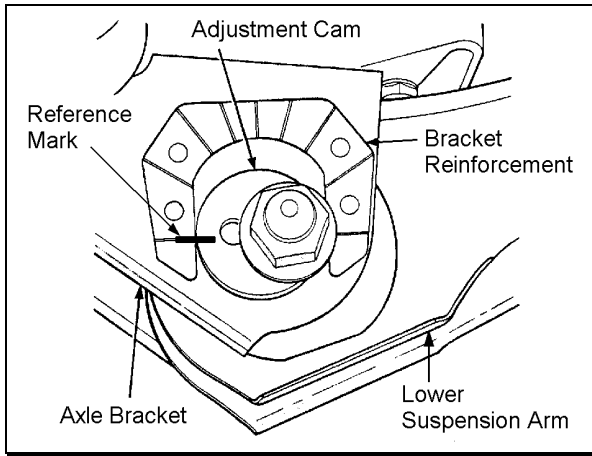


Figure 3

3. If equipped with ABS brakes, remove sensor wires and clamps from the inboard side of the lower arms. Save clamps for reuse.

NOTE: Remove and replace one suspension arm at a time.

4. Remove the nut, cam, and cam bolt from the axle bracket. Remove the nut and bolt from the frame bracket. Remove the lower suspension arm. See Figure 4

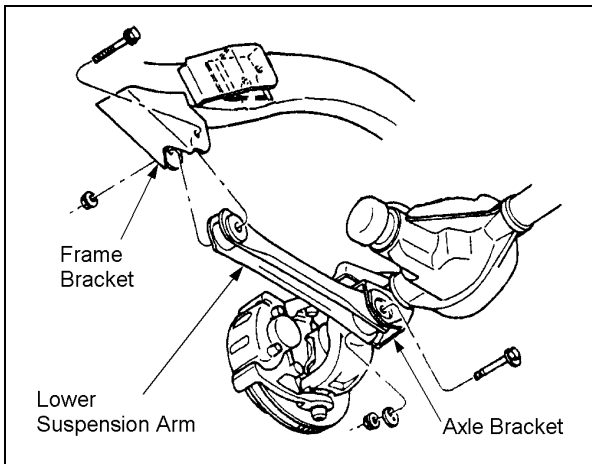


Figure 4

5. Install a new Rancho Lower Suspension Arm, along with four shims from kit 860070, to the frame and axle brackets. See figure 5. Use original hardware but do not tighten.

NOTE: Position the arm so that the grease fittings are accessible. Also, the cam adjuster bolt may have to be installed from the opposite way.

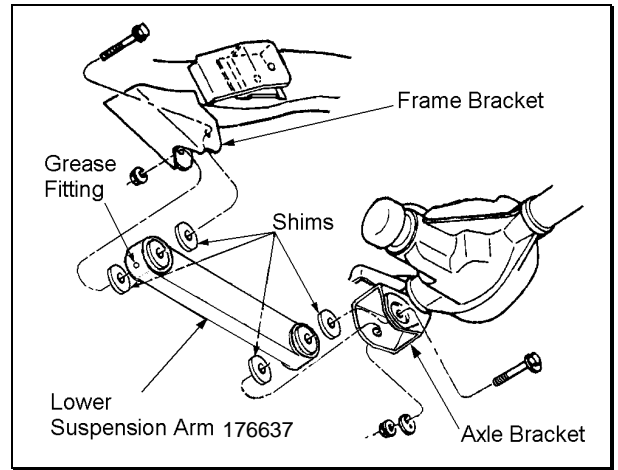


Figure 5

6. Repeat steps 4 and 5 for the other front suspension lower arm.
7. If applicable, drill a 23/64" hole into each lower arm and reinstall the ABS sensor wires. Use the original clamps.

Shock & Spring Installation

1. Lower the front axle and remove the hydraulic jack.
2. Compress a new coil spring (615 or 618) to 16" in length. Use a quality spring compressor like the one shown in figure 6.

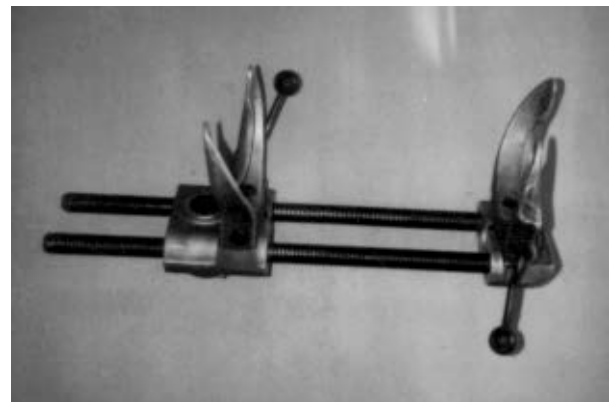


Figure 6

3. Place the rubber bump stop and bump stop mount inside the compressed spring. Install the spring into the upper and lower spring pockets. Carefully remove the spring compressor.
4. Rotate spring so pig tail end fits back in spring pocket. Install spring retainer and bolt. Tighten to 16 FT-LBS.
5. Reinstall bump stop mount and rubber bump stop.

6. Repeat steps 2 through 5 for other side.
7. Install one retaining washer and grommet onto each new front shock absorber. Attach shocks to axle brackets. Tighten bolts to 23 FT-LBS.
8. Install front wheels and lower vehicle to the ground. Tighten lug nuts to 80--110 FT-LBS.
9. Position shock stud through upper mounting hole. Install upper shock grommet, retainer and nut. Tighten to 17 FT-LBS. Repeat for other side.
10. Reconnect the stabilizer bar to the front axle. Tighten both lower link bolts to 70 FT-LBS.
11. Tighten the lower suspension arm to frame bracket nut and bolt to 130 FT-LBS (both sides).
12. Align the reference marks on the adjustment cams and lower arm axle brackets. Tighten nuts to 85 FT-LBS.
13. Grease new lower suspension arms until you see a slight amount of grease coming out of bushings. **DO NOT OVER GREASE!!!**

REAR SUSPENSION

Shock & Spring Removal

1. Chock front wheels.
2. Disconnect the stabilizer bar links from the stabilizer bar.
3. Disconnect the track bar from the frame bracket. See figure 7.
4. Raise the rear of the vehicle and support the frame with jack stands. Remove the rear wheels.
5. Separate the track bar from the axle bracket. Remove the track Bar. See Figure 7.

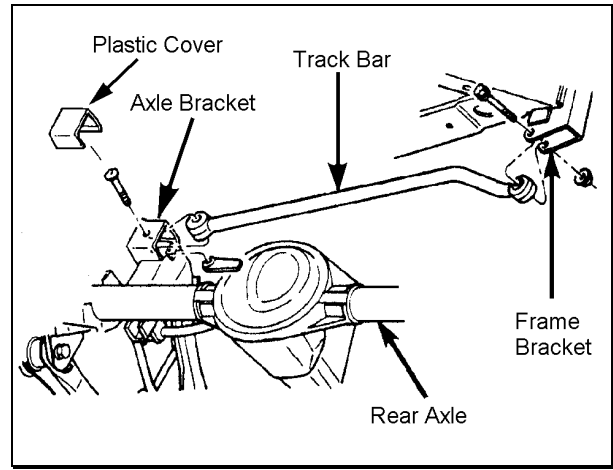


Figure 7

6. Support the rear axle with a floor jack and remove the shock absorbers.
7. Mark the orientation of the coil springs on the axle pads. Carefully lower the rear axle until the coil springs are free from the upper mount seat. Remove the coil springs.

Track Bar Bracket Installation

1. Place track bar bracket 130019 on top of the axle bracket as shown in figure 8. Insert a 14mm bolt through both brackets. Using the new bracket as a template, mark the two additional holes on the axle bracket.

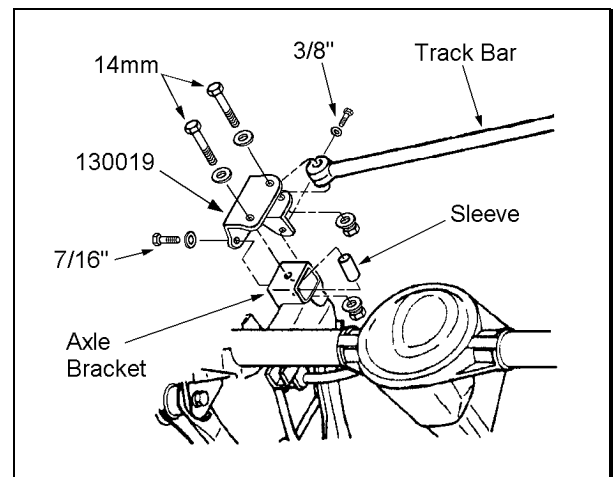


Figure 8

2. Remove bracket and drill holes. Drill a 13/32" hole through the top of the axle bracket and 15/32" hole through the side.
3. Reinstall the track bar bracket and attach it to the axle with the sleeve and hardware from kit 860072. See Figure 8. Tighten to specifications.

4. Insert track bar into track bar bracket and install the 14mm hardware from kit 860072. Do not tighten.
5. Raise the rear axle and position the track bar into the frame bracket. Loosely install the original hardware.
6. Bend gas tank skid plate away from track bar if necessary.

Lower Arm Replacement

NOTE: Remove and replace one suspension arm at a time.

1. Support the rear axle with a hydraulic jack.
2. Remove the lower arm axle and frame mounting bolts. Remove the lower suspension arm.
3. Install a new Rancho lower suspension arm, along with four shims from kit 860070, to the frame and axle brackets. See figure 9. Use original hardware but do not tighten.

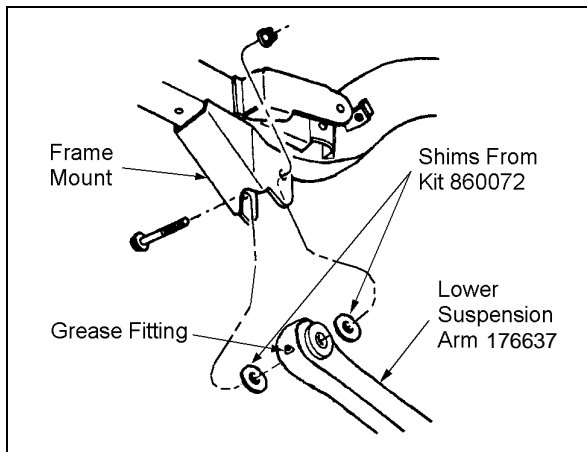


Figure 9

NOTE: Install two shims at each mounting point, one on either side of the bushing assembly. Also, position the arm so that the grease fittings are accessible.

4. Repeat steps 2 and 3 for the other side.

Bump Stop Spacer & Coil Spring Installation

1. Remove the rubber bump stop and bump stop bracket from the upper spring mount.
2. Insert a Rancho spacer from kit 8567 and reinstall the bracket with the 10mm hardware from kit 860073. See figure 10.

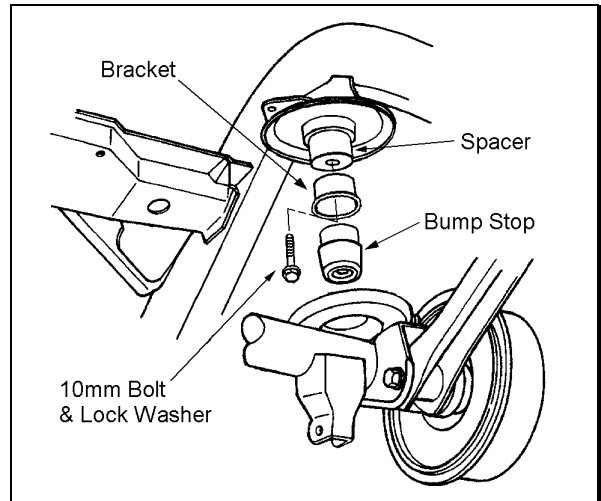


Figure 10

3. Insert the bump stop into the bump stop bracket. Repeat steps 1 through 3 for other side.
4. Lower rear axle and position the new coil springs onto the axle pads. Align springs with reference marks. Raise the axle until the spring seats in the upper mount.

NOTE: When installing coil springs, make sure that the rubber damper is positioned in the upper mount and the small egg-shaped coil end is at the top.

5. Install new Rancho rear shocks to the upper frame rail. Tighten mounting bolts to 23 FT-LBS.
6. Attach shocks to the axle brackets loosely.
7. Install wheels and lower vehicle to the ground. Do not remove wheel chocks. Tighten lug nuts to 80—110 FT-LBS.
8. Tighten the lower shock mounting bolts and the track bar mounting bolts to 74 FT-LBS.
9. Reconnect stabilizer bar links. Tighten nuts/bolts to 40 FT-LBS.
10. Tighten all lower arm mounting nuts to 130 FT-LBS.

11. Grease new lower suspension arms until you see a slight amount of grease coming out of bushings. DO NOT OVER GREASE!!!

TRANSMISSION & TRANSFER CASE

Crossmember Relocation

1. If applicable, remove the bolts attaching the automatic transmission skid plate to the frame rails and the transfer case crossmember. Remove the skid plate.

NOTE: The OE automatic transmission skid plate cannot be used with this suspension system.

2. Place the transmission in neutral. Support the transfer case crossmember/skid plate with a hydraulic jack. Loosen the 6 bolts holding the crossmember to the frame. See figure 11.

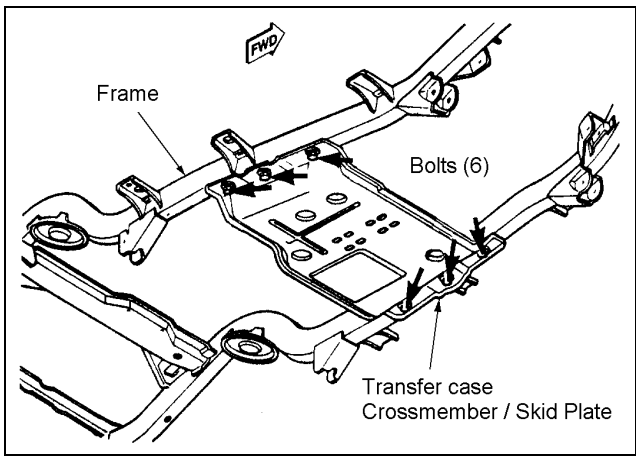


Figure 11

3. Remove 3 bolts on one side and carefully lower the crossmember/skid plate.
4. Place 3 spacers from kit 860161 between the crossmember and the frame with the conical end of the spacer facing down. See figure 12a. For vehicles with an automatic transmission, add 3 shims.
5. If flat head screws were removed, install a conical washer and apply thread lock to 3 flat head screws from kit 860161. Insert the screws through the crossmember, spacers, and into the frame. See figure 12a.

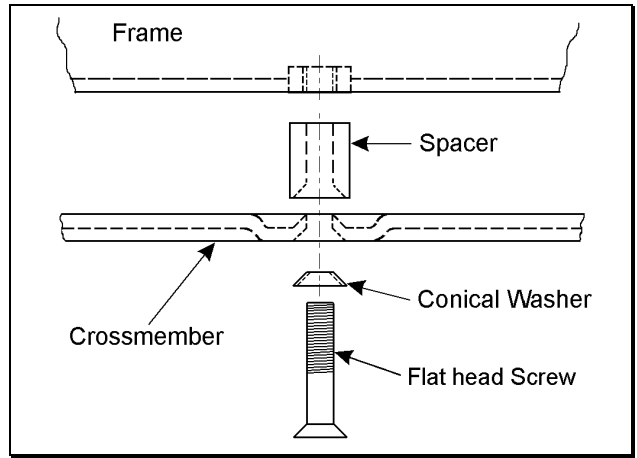


Figure 12a

6. If hex head screws were removed, install the hardware from kit 860483. See figure 12b.

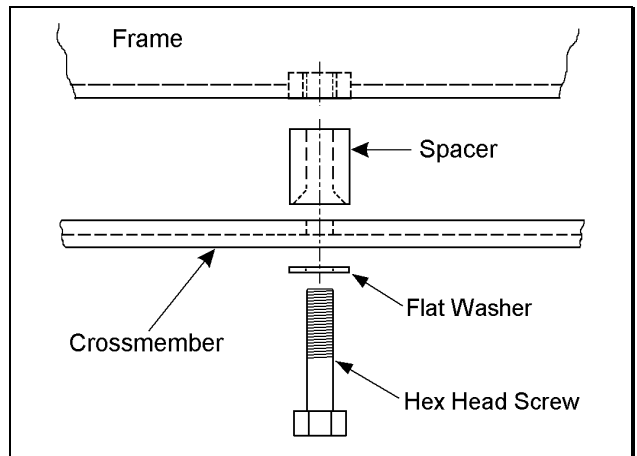


Figure 12b

7. Repeat steps 3 through 6 for the other side of the crossmember. Tighten all bolts to 45 FT-LBS.

Linkage Relocation & Adjustment

1. Pull back carpet/mat to gain access to torque shaft bracket mounting screws. If necessary, loosen the screws attaching the console to the floor panel.
2. Remove the four screws that attach the torque shaft bracket to the floor pan. See figure 13.

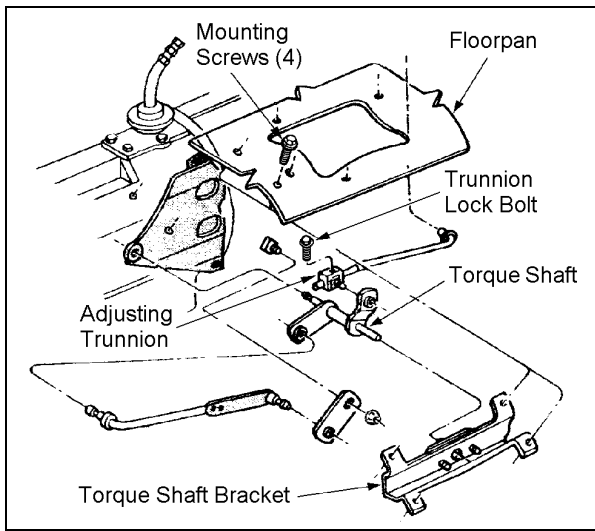


Figure 13

3. Slide the torque shaft bracket off the torque shaft, and remove the bearing plate & gasket. Drill out the two threaded holes in the torque shaft bracket to 9/32".
4. Attach the shift relocating bracket (from kit 860071) to the torque shaft bracket as shown in figure 14. Use the hardware from kit 860071.
5. Attach the bearing plate, with gasket, to the shift relocating bracket. See figure 14.

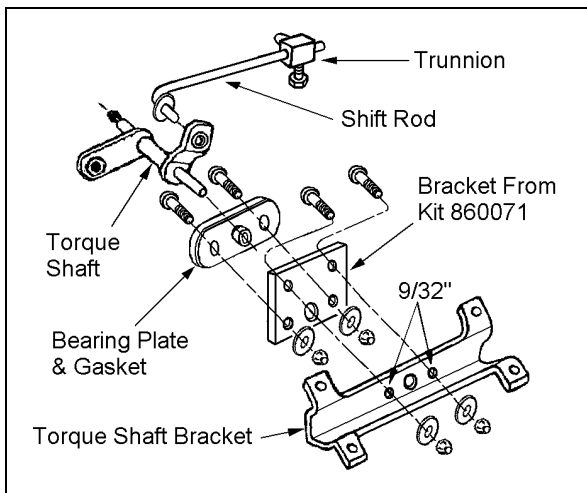


Figure 14

6. Insert the torque shaft into the bearing plate and reinstall the torque shaft bracket to the floor pan. Verify that the torque shaft is level and the shifting linkage moves without restriction. If necessary, file the end of the shift rod to provide adequate clearance.
7. Shift transfer case into 4L position and loosen lock bolt on adjusting trunnion.

NOTE: Be sure shift rod slides freely in trunnion.

8. Verify that transfer case range lever is fully engaged in 4L position. Tighten adjusting trunnion lock bolt.
9. Reinstall carpet/mat and tighten console mounting bolts.

FLOOR PAN MODIFICATION (MANUAL TRANS ONLY)

1. Move the seats to the full rearward position.
2. Pry up the shift boot and bezel from the floor console. See figure 15.

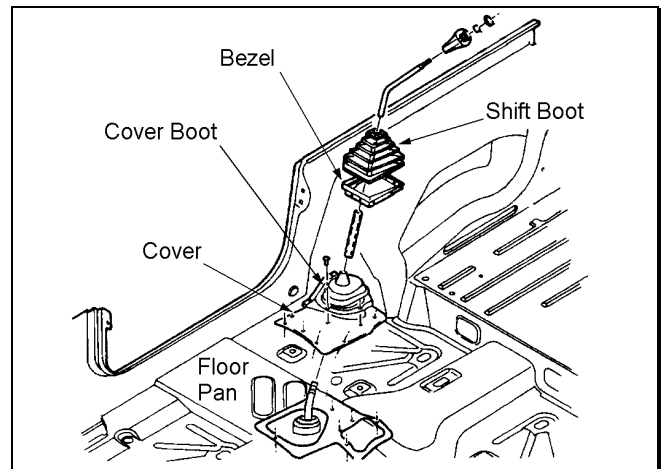


Figure 15

3. Remove the bolts attaching the console to the floor pan.
4. Lift the console upward and remove through the passenger door.
5. Remove the 4 screws attaching the cover boot to the cover. Slide the boot upward to expose the opening in the cover and floor pan.
6. Shift the transmission into 2nd and reverse. Verify a minimum of 1/8" clearance between the shift lever and floor pan. If necessary, enlarge the opening in the floor pan with a half round file.
7. Reposition the cover boot. Install one screw on the left side or 9 o'clock position.
8. Rotate the boot clockwise to match the increased floor pan opening. Mark and drill the three new mounting holes. See figure 16.

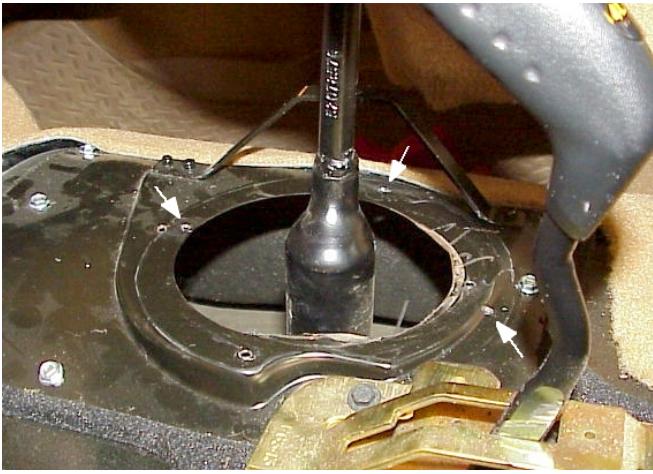


Figure 16

9. Reinstall the cover boot, console, and shift boot.

FINAL CHECKS AND ADJUSTMENTS

1. Turn the front wheels completely left then right. Verify adequate tire, wheel, and brake hose clearance. Inspect steering and suspension for tightness and proper operation.

NOTES:

2. With the suspension at maximum extension (full droop), inspect and rotate all axles and drive shafts. Check for binding and proper slip yoke insertion. The slip yoke should be inserted a minimum of one inch into the transfer case and/or transmission.
3. Ensure that the vehicle brake system operates correctly. If new brake hoses were installed, verify that each hose allows for full suspension movement.
4. Readjust headlamps. Have vehicle Aligned at a certified alignment facility.

ADJUSTMENT	PREFERRED	RANGE
Caster	7°	±1.0°
Camber (fixed angle)	-0.25°	±0.63°
Toe-In (each wheel)	0.15°	±0.15°
Thrust Angle	0	±0.15°

Please retain this publication for future reference. See Important Note O.